



DLX & DLX B MA/AD

Analogue dosing pump with manual flow rate regulation

The DLX MA/AD model consists of series of metering pumps enabling manual regulation by knob.

GENERAL FEATURES

- Double manual regulation by knob.
- Selectable regulation range: 0 – 20% or 0 – 100%.
- Level sensor input (on request).
- Anti-acid plastic casing.
- IP65 protection degree.
- Wall (DLX) and foot mounted (DLXB):
- Standard configuration: pump head PVDF, PTFE diaphragm, ceramic balls, FPM seals*.
- Automatic air bleed available on request (flowrates 5 – 15 l/h).
- Power supply: 230 V **
- Strokes frequency:

10 – 100 strokes per minute

* different configurations available upon request

** other power supplies available on request



STANDARD ACCESSORY KIT PVDF-FPM

All DLX are supplied with a standard PVDF – FPM installation kit, made up of 2m discharge PE tube (4x6mm), 2m suction + 2m bleeding PVC crystal tube (4x6mm), PVDF foot-filter, PVDF injection valve. Other configurations are available upon request.




TECHNICAL FEATURES

Model	Flow Rate l/h (US GI/h)	Max Pressure Bar - PSI	Max frequency (imp./min)	Injection volume /imp. (cc per colpo)	Standard power supply (Volts -Hz)	Power consumption (Watts)	Net weight (Kg)
0115	1 (0.26)	15	120	0,14	230V - 50-60 Hz	37	2.3
	2 (0.53)	10		0,28			
	3 (0.78)	5		0,42			
0507	5	7	120	0,69	230V - 50-60 Hz	37	2.3
	6	5		0,83			
	8	2		1,11			

PRESSURE-FLOWRATE DIAGRAM

Pressione (bar) – Portata (l/h)
Pressure (bar) – Flow Rate (l/h) Chart


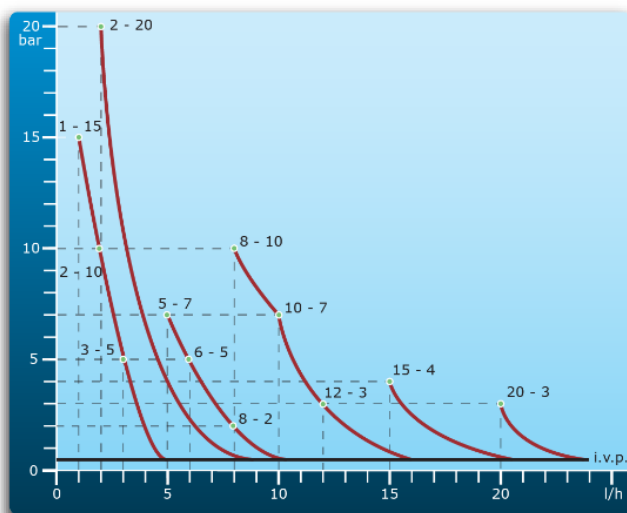


CODES

Code	Description
PLX232225E	DLX MA/AD 1 - 15
PLX230385E	DLX MA/AD 5 - 7

Code	Description
PBX232225E	DLXB MA/AD 1 - 15
PBX230385E	DLXB MA/AD 5 - 7

DIMENSIONS (MM)

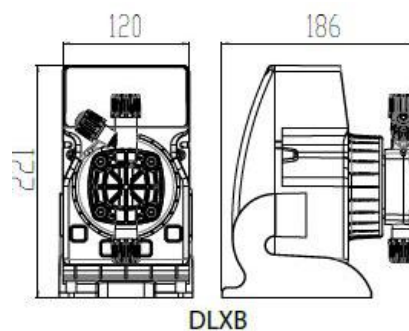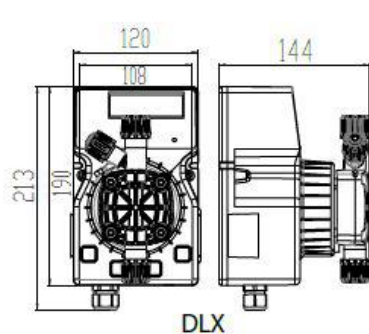

DLX & DLX B SERIES

Solenoid dosing pumps