

PowerFlo II

YEARS OF WARRANTY



SMALL PUMP FOR OUTSTANDING RESULTS!

- **Pump designed for small pools** and/or above ground pools
- **Exceptional performance**, one of the best in its category
- Recommended for pools **up to 68 m³***

* Calculation based on 6 hours turnover





Easy access to the pre-filter through the quarter turn cover




Drainage caps to make wintering easier



50 mm outlet or $\varnothing$ 32/38 mm fluted adapters

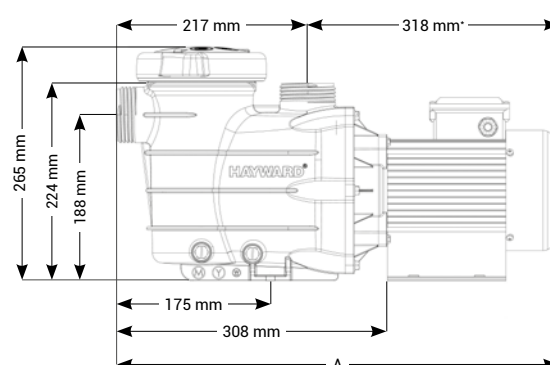

Column of water (m)

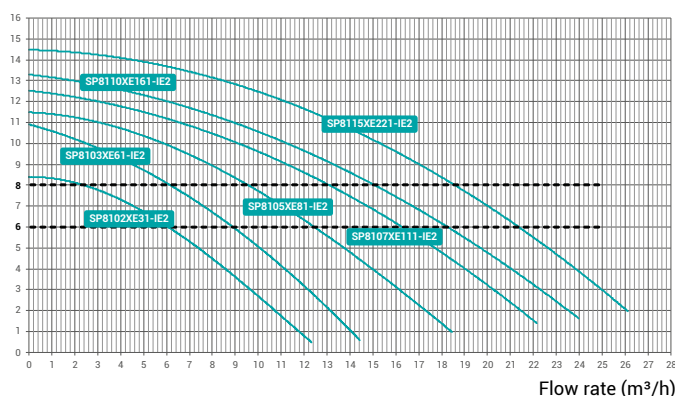

Technical Specifications

Max. water temp.	35°C
Adapter	32/38 mm
Mechanical seal	AISI 304S, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/PP0(Noryl®)+BRASS/PC
Prefilter basket size	1.1 L

Type HP	Total length A (mm)	Weight (kg)	Adaptors (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item	
0.25	504	7.9	50 and 32/38	6.15 m ³ /h**	360	235	1.6	32	SP8102XE31E2	IE2 ✓
0.33	504	7.9	50 and 32/38	6.26 m ³ /h	460	330	2	32	SP8103XE61E2	IE2 ✓
0.5	504	8.8	50 and 32/38	9.71 m ³ /h	580	440	2.6	32	SP8105XE81E2	IE2 ✓
3/4	504	9.8	50 and 32/38	13 m ³ /h	730	585	3.2	32	SP8107XE111E2	IE2 ✓
1	504	9.8	50 and 32/38	15 m ³ /h	860	690	3.8	32	SP8110XE161E2	IE2 ✓
1.5	540	12.3	50 and 32/38	18.75 m ³ /h	1050	860	4.6	32	SP8115XE221E2	IE2 ✓

* At 8 m water column pressure

** At 6 m water column pressure

POWERFLO II